

SMTi Manual - how to repair all software problems in sagem phones

(Simlock without sim card , Hardware Failure , Message (!) , Blue screen , restart , hang)


- 1 . Run latest SMTi exe
- 2 . Connect correct cable to SMTi Box or to another interface if you use virtual com port
- 3 . Add correct flash to buffer .



- 4 . Unselect all option
- 5 . Select Write FirmWare + Repair EEPROM



- 6 . Click Detect phone button (you see information about phone)
- 7 . Click Write Flash button (progress bar for write flash started, do not stop this process)
- 8 . After Write FirmWare process finished unselect all options
- 9 . Check whether on the buffer is the same flash file that was uploaded to your phone
- 10 . If yes, unselect all options
- 11 . Select Finalise Flashing

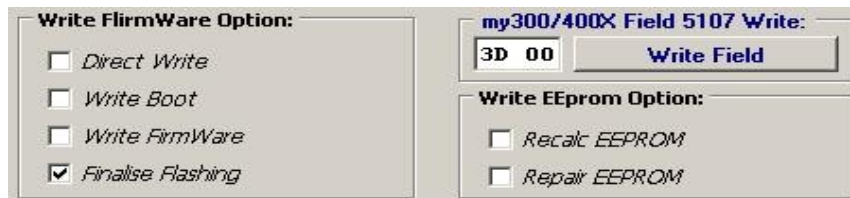

- 12 . Click Write Flash button
- 13 . After few scond your phone already repaired.
- 14 . The phone has a new firmware and is unlocked

Sagmaster Team (18-05-2009)